

07-28-00

EK287384854us

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Date: 7-27-00

Docket No. AUS9-2000-0294-US1

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of Inventor(s):

Mark David Nielsen

Michael Albert Perks

For: APPARATUS AND METHOD FOR MAINTAINING OBJECT ASSOCIATIONS
IN AN OBJECT ORIENTED ENVIRONMENT

Enclosed are also:

- ☒ 22 Pages of Specification including an Abstract
☒ 10 Pages of Claims
☒ 8 Sheet(s) of Drawings
☒ A Declaration and Power of Attorney
☒ Form PTO 1595 and assignment of the invention to IBM Corporation

CLAIMS AS FILED

FOR	Number Filed		Number Extra		Rate		Basic Fee (\$690)
Total Claims	30	-20 =	10	X	\$ 18	=	\$ 180.00
Independent Claims	6	-3 =	3	X	\$ 78	=	\$ 234.00
Multiple Dependent Claims	0			X	\$260	=	\$
Total Filing Fee							= \$1,104.00

☒ Please charge **\$1,104.00** to IBM Corporation, Deposit Account No. 09-0447.☒ The Commissioner is hereby authorized to charge payment of the following fees associated with the communication or credit any over payment to IBM Corporation, Deposit Account No. 09-0447. A duplicate copy of this sheet is enclosed.☒ Any additional filing fees required under 37CFR § 1.16.☒ Any patent application processing fees under 37CFR § 1.17.

Respectfully,

David A. Mims, Jr.

Reg. No. 32,708

Intellectual Property Law Dept.

IBM Corporation

11400 Burnet Road 4054

Austin, Texas 75758

Telephone: (512) 823-0950

07/27/00
JC840 U.S. PTOJC759 U.S. PTO
09/627177
07/27/00

09627177 072700

APPARATUS AND METHOD FOR MAINTAINING OBJECT ASSOCIATIONS IN AN OBJECT ORIENTED ENVIRONMENT

1. Technical Field:

2. Description of Related Art:

In object oriented design, two classes can be related using an association which has cardinalities on each end. For example, an Employee has an address and a single Employee (cardinality 1) has one or more Addresses (cardinality 1...n). Typically, the Employee object keeps a list of addresses in a collection class, such as a Java vector. It is also possible that the Address object may keep a reference to the Employee that owns it.

It can be seen that there are four possible combinations of object association cardinalities: one to one; one to many; many to one, and many to many. In order to handle all of these possible object associations, the amount of code necessary to perform each association and update each association may become extremely large and unmaintainable. Thus, it would be beneficial to have an apparatus and method for maintaining object associations in an object oriented

environment in which the amount of code necessary to handle each possible combination of object association cardinalities is minimized.

SUMMARY OF THE INVENTION

The present invention provides an apparatus and method for maintaining object associations in an object oriented environment. The apparatus and method of the present invention makes use of value holders to enable a single method to perform the creation, update and deletion of object associations for all combinations of possible object associations including one to one associations, one to many associations, many to one and many to many associations. Because two common methods are used to perform the creation, updating and deletion of all object associations, the amount of code necessary to handle each possible combination of object association cardinalities is minimized.

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 2A is an exemplary block diagram of a data processing system according to the present invention;

Figure 2B is an exemplary block diagram of a data processing system according to the present invention;

Figures 3A and 3B are block diagrams illustrating an association change in a one to many object association;

Figures 4A and 4B are block diagrams illustrating an association change in a one to one object association;

Figures 5A and 5B are block diagrams illustrating a change from a one to one object association to a many to many object association;

Figure 6 is a flowchart outlining an exemplary operation of the present invention when adding an object association; and

Figure 7 is a flowchart outlining an exemplary operation of the present invention when removing an object association.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures, and in particular with reference to **Figure 1**, a pictorial representation of a distributed data processing system in which the present invention may be implemented is depicted. Distributed data processing system **100** is a network of computers in which the present invention may be implemented. Distributed data processing system **100** contains a network **102**, which is the medium used to provide communications links between various devices and computers connected together within distributed data processing system **100**. Network **102** may include permanent connections, such as wire or fiber optic cables, or temporary connections made through telephone connections.

In the depicted example, a server **104** is connected to network **102** along with storage unit **106**. In addition, clients **108**, **110**, and **112** also are connected to a network **102**. These clients **108**, **110**, and **112** may be, for example, personal computers or network computers. For purposes of this application, a network computer is any computer, coupled to a network, which receives a program or other application from another computer coupled to the network. In the depicted example, server **104** provides data, such as boot files, operating system images, and applications to clients **108-112**. Clients **108**, **110**, and **112** are clients to server **104**. Distributed data processing system **100** may include additional servers, clients, and other devices not shown. In the depicted example, distributed data processing system **100** is the Internet with network **102** representing a worldwide collection of networks and gateways that use the TCP/IP

00449 442960

suite of protocols to communicate with one another. At the heart of the Internet is a backbone of high-speed data communication lines between major nodes or host computers, consisting of thousands of commercial, government, educational, and other computer systems, that route data and messages. Of course, distributed data processing system 100 also may be implemented as a number of different types of networks, such as, for example, an Intranet or a local area network.

Figure 1 is intended as an example, and not as an architectural limitation for the processes of the present invention. The present invention may be implemented in the depicted distributed data processing system or modifications thereof as will be readily apparent to those of ordinary skill in the art.

With reference now to Figure 2A, a block diagram of a data processing system which may be implemented as a server, such as server 104 in Figure 1, is depicted in accordance to the present invention. Data processing system 200 may be a symmetric multiprocessor (SMP) system including a plurality of processors 202 and 204 connected to system bus 206. Alternatively, a single processor system may be employed. Also connected to system bus 206 is memory controller/cache 208, which provides an interface to local memory 209. I/O Bus Bridge 210 is connected to system bus 206 and provides an interface to I/O bus 212. Memory controller/cache 208 and I/O Bus Bridge 210 may be integrated as depicted.

Peripheral component interconnect (PCI) bus bridge 214 connected to I/O bus 212 provides an interface to PCI local bus 216. A modem 218 may be connected to PCI local bus 216. Typical PCI bus implementations will support

Docket No. AUS9-2000-0294-US1

four PCI expansion slots or add-in connectors. Communications links to network computers 108-112 in **Figure 1** may be provided through modem 218 and network adapter 220 connected to PCI local bus 216 through add-in boards.

Additional PCI bus bridges 222 and 224 provide interfaces for additional PCI buses 226 and 228, from which additional modems or network adapters may be supported. In this manner, server 200 allows connections to multiple network computers. A memory mapped graphics adapter 230 and hard disk 232 may also be connected to I/O bus 212 as depicted, either directly or indirectly.

Those of ordinary skill in the art will appreciate that the hardware depicted in **Figure 2A** may vary. For example, other peripheral devices, such as optical disk drive and the like also may be used in addition or in place of the hardware depicted. The depicted example is not meant to imply architectural limitations with respect to the present invention.

The data processing system depicted in **Figure 2A** may be, for example, an IBM RISC/System 6000 system, a product of International Business Machines Corporation in Armonk, New York, running the Advanced Interactive Executive (AIX) operating system.

With reference now to **Figure 2B**, a block diagram of a data processing system in which the present invention may be implemented is illustrated. Data processing system 250 is an example of a client computer. Data processing system 250 employs a peripheral component interconnect (PCI) local bus architecture. Although the depicted example employs a PCI bus, other bus architectures such as Micro Channel and ISA may be used.

Docket No. AUS9-2000-0294-US1

Processor 252 and main memory 254 are connected to PCI local bus 256 through PCI Bridge 258. PCI Bridge 258 also may include an integrated memory controller and cache memory for processor 252. Additional connections to PCI local bus 256 may be made through direct component interconnection or through add-in boards. In the depicted example, local area network (LAN) adapter 260, SCSI host bus adapter 262, and expansion bus interface 264 are connected to PCI local bus 256 by direct component connection. In contrast, audio adapter 266, graphics adapter 268, and audio/video adapter (A/V) 269 are connected to PCI local bus 256 by add-in boards inserted into expansion slots. Expansion bus interface 264 provides a connection for a keyboard and mouse adapter 270, modem 272, and additional memory 274. SCSI host bus adapter 262 provides a connection for hard disk drive 276, tape drive 278, and CD-ROM 280 in the depicted example. Typical PCI local bus implementations will support three or four PCI expansion slots or add-in connectors.

An operating system runs on processor 252 and is used to coordinate and provide control of various components within data processing system 250 in Figure 2B. The operating system may be a commercially available operating system such as Microsoft Windows NT available from Microsoft Corporation, AIX, OS/2, or the like, which are available from International Business Machines Corporation.

An object oriented programming system such as Java may run in conjunction with the operating system and may provide calls to the operating system from Java programs or applications executing on data processing system 250.

The present invention provides an apparatus and method for maintaining object associations in an object oriented environment. The present invention may operate on a variety of computer platforms and object oriented languages such as a Java, Smalltalk, C++ or Eiffel, and the like. For example, the present invention may operate in conjunction with a Java virtual machine (JVM) yet within the boundaries of a JVM as defined by Java standard specifications.

The present invention provides a mechanism by which object associations are maintained and modified. The present invention is capable of handling all four combinations of object association cardinalities, one to one, one to many, many to one and many to many, with a minimal amount of code to perform the object associations. In the following description, example

code is provided in the Java programming language. As discussed above, Java is but one exemplary embodiment of the present invention and other programming languages may be used without departing from the spirit and scope of the present invention. Those of ordinary skill in the art may readily determine how to convert the provided examples to their object oriented programming language of choice such as C++, Smalltalk or Eiffel.

Figures 3A and **3B** are exemplary block diagrams illustrating an update of an object association from a one to one object association to a one to many object association. As shown in **Figures 3A** and **3B**, a class A has a one-to-any association with class B. That is, an instance of class A can contain 0, 1 or many references to different instances of class B. A particular instance of class B contains at most one reference to an instance of class A. The multiple instances of class B that class A can reference are stored in a collection. For the description and examples shown below, vector will be used for the collection. Those of ordinary skill in the art may use any collection representation providing that object uniqueness is maintained.

Assume that a1 and a2 are instances of class A and b1 and b2 are instances of class B. As shown in **Figure 3A**, suppose a1 contains a reference to one instance of class B (b1). Suppose also that another instance of class B (b2) references an instance of class A (a2).

Suppose now that it is required that the instance b2 is to be associated with the instance a1 as shown in **Figure 3B**. In order to perform this operation, three steps must be executed. These steps include:

- 1) removing b2 from the collection in a2;
- 2) adding b2 to the collection in a1; and

3) setting the reference to class A in b2 to a1.

In order to perform these three steps, various methods may be employed. In the present invention, the following methods exist on class A to aid in performing these three steps:

- 1) public vector getB() - returns the vector of B instances;
- 2) public void addB(B element) - adds an instance of B to the vector;
- 3) public boolean removeB(B element) - removes an instance of B from the vector; and
- 4) public void setB(Vector v) - stores a new vector.

In addition to the methods for class A, the following methods exist on class B:

- 1) public A getA() - returns a reference to A; and
- 2) public void setA(A element) - sets the reference to A and overwrites the previous reference value for A.

The Java code to implement the operation of updating the one to one object association to a one to many object association is as follows:

- 1) a2.getB().removeElement(b2);
- 2) a1.getB().addElement(b2); and
- 3) b2.setA(a1).

A many-to-one object association can be implemented in the same manner as the one to many object association described above with regard to **Figures 3A and 3B**.

Now assume that a one to one object association is to be changed to a different one to one object association, as shown in **Figures 4A and 4B**. For example,

096247-0300

- and

- For the object association in which many objects in class A are associated to many objects in class B, it is more difficult to ascertain if references to objects should be removed or maintained. For example, suppose a1 contains a reference to an instance of class B (b1), as shown in **Figure 5A**. Suppose also that another instance of class B (b2) contains a reference to one instance of class A (a2). Now suppose that it is required that the instance b2 reference a1 as shown in **Figure 5B**.

- 1) add b2 to the collection in a1; and
- 2) add a1 to the collection in b2.

A value holder is simply an object that wrappers another object to perform some other function, i.e. the

Docket No. AUS9-2000-0294-US1

value holder implements a proxy pattern as described in "Design Patterns" by Gamma, Helm, Johnson and Vlissides. The value holders of the present invention are used to ease the implementation of a single method that maintains the object instance associations.

With the present invention, the following value holder methods are added to class A:

- 1) `public ValueHolderInterface getBHolder()` - returns reference to B's value holder; and
- 2) `public void setBHolder (ValueHolderInterface holder)` - sets B's value holder.

The following value holder methods are added to class B:

- 1) `public ValueHolderInterface getAHolder()` - returns reference to A's value holder; and
- 2) `public void setBHolder (ValueHolderInterface holder)` - sets A's value holder.

The ValueHolderInterface can be implemented as a Java interface that specifies the holder methods:

- 1) `public Object getValue()` - returns the object wrapped by the value holder; and
- 2) `public void setValue(Object value)` - sets the object to be wrapped by this value holder.

With the use of the ValueHolderInterface and the value holder methods above, the present invention is capable of making use of a single method in common code that can handle all cases of creating and updating an object association. The method (referred to as `addAssociation`) according to the present invention needs eight parameters of which first and third are optional:

- 1) `oldSourceHolder` - the value holder that the old

002220442960

3) `sourceHolder` - the value holder that the source currently points to;

5) source - the source object instance;

7) `sourceCardinality` - false if the cardinality of the source is 1, true if it is many; and

In the case of a one to one object association, for example, the above eight parameters would have the following values:

```
2) oldTargetHolder = a2 value holder;
```

4) targetHolder = a1 value holder;

```
6) target = a1;
```

7) `sourceCardinality = false`; and

8) `targetCardinality = false`.

```
1)  oldSourceHolder.setValue(null) - sets the
reference to A in b1 to null;
```

2) `targetHolder.setValue(b2)` - sets the reference

Docket No. AUS9-2000-0294-US1

to class B in a1 to b2;

3) sourceHolder.setValue(a1) - sets the reference to class A in b2 to a1; and

4) oldTargetHolder.setValue(null) - sets the referent to B in a2 to null.

The generalized method has up to four basic steps and each step has two variations depending on the cardinality of the object. The steps are to update the old source, update the target, update the source, and update the old target. Table 1 summarizes which steps are used to perform creation and updates of each of the four combinations of object associations. The symbols in the table represent the following operations:

1a) Remove source from old source value holder in the target;

1b) Remove source from old source value holder vector in the target;

2a) Set the new target in the target value holder from the source;

2b) Add the new target to the target value holder vector from the source;

3a) Set the new source in the source value holder from the target;

3b) Add the new source to the source value holder vector from the target;

4a) Remove target from old target value holder in the source; and

4b) Remove target from old target value holder vector in the source.

Step	1 to 1	1 to Many	Many to 1	Many to Many
1	1a	1b	N/A	N/A

Figure 6 is a flowchart outlining an exemplary operation of the present invention when creating or updating an object association. As shown in Figure 6, the operations starts, in step 1, with determining if a source value holder is supplied (step 610). If so, a determination is made as to whether there are multiple targets (step 612). If not, a determination is made as to whether or not there are multiple sources (step 614). If there are multiple sources, the Source (parameter 5) is removed from the vector in the old source value holder (step 616). If there are not multiple sources, the old sourceHolder value is set to null (step 618).

Thereafter, the operation continues to step 3. In step 3, a determination is made as to whether the source value holder is supplied (step 628). If so, a determination is made as to whether there are multiple sources (step 630). If there are not multiple sources,

Docket No. AUS9-2000-0294-US1

the source value holder value is set to the source (step 632). If there are multiple sources, a determination is made as to whether there are multiple targets (step 634). If there are multiple targets, the source is added to the vector in the source value holder (step 636). If there are not multiple targets, an exception is thrown or error code is returned and thereafter the operation ends (step 638).

There is the potential that a large vector of objects may need to be loaded from a data source such as a database before the new object can be added. This can be wasteful in terms of computing time and memory storage. This can be avoided by having the association in only one direction from the many side to the one side. The vector and the corresponding add and remove methods are removed from the class on the 1 side (class A in the examples above). The only method available now is the set method on the many side (method setA on class B). If a single directional association is used, the steps needed are reduced to simply setting the reference to class A in b2 to a1. A single directional association is indicated by not supplying the SourceHolder object to the addAssociation method; that is a null or some other "non-value" is used instead. In this case, the algorithm skips steps 1 and 3. If a single directional association is not implemented, then the use of the set method (setA) should be replaced by the add method (addB). Using the example above, the Java code b2.setA(a1) is replaced by its equivalent of a1.addB(b2).

Thereafter, the operation continues to step 4. In step 4, a determination is made as to whether a target value holder is supplied (step 640). If so, a determination is made as to whether there are multiple

Docket No. AUS9-2000-0294-US1

sources (step 642). If there are not multiple sources, a determination is made as to whether there are multiple targets (step 644). If there are not multiple targets, the old targetHolder value is set to null (step 646). If there are multiple targets, the target is removed from the vector in the old target value holder (step 648). Thereafter the operation ends.

In addition to the above method for creating or updating an object association, the present invention is capable of making use of a single method in common code to handle all cases of deleting an object association. The object association deletion method (referred to as deleteAssociation) is implemented in classes that contain an association to a many object, i.e. an object that is associated with many other objects in a class.

The deletion method uses the following six parameters of which the first is optional:

- 1) sourceHolder - the value holder that source currently points to;
- 2) targetHolder - the value holder that the target currently points to;
- 3) source - the source object instance;
- 4) target - the target object instance;
- 5) sourceCardinality - false if the cardinality of the source is 1, true if it is many; and
- 6) targetCardinality - false if the cardinality of the target is 1, true if it is many.

In the case of a one to many object association, for example, the values of the parameters would be as follows:

- 1) sourceHolder = a1 value holder;
- 2) targetHolder = b1 value holder;
- 3) source = a1;

0962717 092800

Docket No. AUS9-2000-0294-US1

- 4) target = b1;
- 5) sourceCardinality = false; and
- 6) targetCardinality = true.

Taking the six parameters described above, a single method may be used to perform deletion of object associations as described above. As an example, if an object association in a one to many object association is to be deleted, the implementation of the method is as follows:

- 1) sourceHolder.setValue(null) - sets the reference to A in b1 to null; and
- 2) targetHolder.getValue().removeElement(b1) - removes the element b1 from the vector in class A.

The generalized method has two steps and the first step has two variations depending on the cardinality of the object. The steps are:

- 1) update the source (either set the value to null - 1a or remove the source element from the source vector in the target - 1b) and
- 2) update the target, i.e. remove the target element from the target vector in the source.

Table 2 summarizes the steps used to delete an object association.

Step	1 to Many	Many to Many
1	1a	1b
2	2	2

Table 2 - Steps Used for Deletion of an Object Association

Figure 7 is a flowchart outlining an exemplary

096247-0700

Thereafter, the operation continues to step 2. In step 2, the target is removed from the vector in the target value holder (step 760). The operation then ends.

- 1) In `addAssociation`, in order to maintain object uniqueness, an object should only be added to the vector if it does not already exist in the vector; and
- 2) The implementation of the `add` or `set` methods that call the `addAssociation` method should ensure that the appropriate holders are passed in. Depending on existing associations the old holders may not exist. Therefore care is needed when determining the parameters passed to

It is important to note that while the present invention has been described in the context of a fully functioning data processing system, those of ordinary skill in the art will appreciate that the processes of the present invention are capable of being distributed in the form of a computer readable medium of instructions and a variety of forms and that the present invention applies equally regardless of the particular type of signal bearing media actually used to carry out the distribution. Examples of computer readable media include recordable-type media such a floppy disc, a hard disk drive, a RAM, and CD-ROMs and transmission-type media such as digital and analog communications links.

The description of the present invention has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to the invention in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. The embodiment was chosen and described in order to best explain the principles of the invention, the practical application, and to enable others of ordinary skill in the art to understand the invention for various embodiments with various modifications as are suited to the particular use contemplated.

Docket No. AUS9-2000-0294-US1

CLAIMS:

What is claimed is:

1. A method of updating an object association between a source object and a target object, comprising:

updating a target value holder of the target object to identify the source object; and

updating a source value holder of the source object to identify the target object;

wherein a value holder is an object that wrappers a target or source object in order to implement a proxy pattern.

2. The method of claim 1, wherein if the object association is a one to one object association, the step of updating the target value holder includes:

setting the new target in the target value holder from the source, and

removing the target from the old target value holder in the source, if the collection already contains the target;

and the step of updating the source value holder includes:

removing the source from the old source value holder in the target, if the collection already contains the source; and

setting the new source in the source value holder from the target.

3. The method of claim 1, wherein if the object association is a one to many object association, the step of updating the target value holder includes:

adding the new target to the target value holder

096317.0320

```
collection from the source, if the collection does not
already contain the target;
```

removing the source from the old source value holder in the target, if the collection already contains the source; and

4. The method in claim 1, wherein if the object association is a many to one object association, the step of updating the target value holder includes:

```

    removing the target from the old target value holder
collection in the source, if the collection already
contains the target;

```

adding the new source to the source value holder collection from the target, if the collection does not already contain the source.

```

    adding the new target to the target value holder
collection from the source, if the collection does not
already contain the target;

```

```
adding the new source to the source value holder
```


7. The method in claim 1, wherein the steps of updating a target and updating a source are performed using a value holder implemented in Java, C++, Smalltalk, Eiffel, or other object oriented language.

```

    a value holder that an old source currently points
to;

```

a value holder that a source currently points to;

a value holder that a target currently points to;

a source value;

a target value;

a source cardinality; and

a target cardinality.

updating a source value holder of the source object
to identify the target object; and

```

    updating a target value holder of the target object
to identify the source object;

```

```
        setting the value in the source value holder to
null;
```

removing the target from the target value holder collection in the source, if the collection already contains the target.

```

    removing the source from the source value holder
collection in the target, if the collection already
contains the source;

```

removing the target from the target value holder collection in the source, if the collection already contains the target.

12. The method of claim 9, wherein the value holder includes a method for setting source and target objects to be wrapped by the value holder, and a method for returning source and target objects wrapped by the value holder.

a value holder that a source currently points to;
a value holder that a target currently points to;
a source value;
a target value;
a source cardinality; and
a target cardinality.

first instructions for updating a target value
holder of the source target to identify the source
object; and

wherein a value holder is an object that wrappers a target or source object in order to implement a proxy pattern.

```

    setting the new target in the target value holder
from the source, and

```

Docket No. AUS9-2000-0294-US1

removing the target from the old target value holder in the source, if the collection already contains the target;

and the second instructions for updating the source value holder includes:

removing the source from the old source value holder in the target, if the collection already contains the source; and

setting the new source in the source value holder from the target.

17. The computer program product of claim 15, wherein if the object association is a one to many object association, the first instructions for updating the target value holder includes:

adding the new target to the target value holder collection from the source, if the collection does not already contain the target;

and the second instructions for updating the source value holder includes:

removing the source from the old source value holder in the target, if the collection already contains the source; and

setting the new source in the source value holder from the target.

18. The computer program product in claim 15, wherein if the object association is a many to one object association, the first instructions for updating the target value holder includes:

setting the new target in the target value holder from the source, and

removing the target from the old target value holder

002347-0700

Docket No. AUS9-2000-0294-US1

collection in the source, if the collection already contains the target;

and the second instructions for updating the source value holder includes:

adding the new source to the source value holder collection from the target, if the collection does not already contain the source.

19. The computer program product in claim 15, wherein if the object association is a many to many object association, the first instructions for updating the target value holder includes:

adding the new target to the target value holder collection from the source,

;

and the second instructions for updating the source value holder includes:

adding the new source to the source value holder collection from the target, if the collection does not already contain the source.

20. The computer program product of claim 15, wherein the value holder includes instructions for setting source and target objects to be wrapped by the value holder, and instructions for returning source and target objects wrapped by the value holder.

21. The computer program product in claim 15, wherein the first instructions for updating a target and the second instructions for updating a source are performed using a value holder implemented in Java, C++, Smalltalk, Eiffel, or other object oriented language.

0962747.0300

22. The computer program product in claim 15, wherein the value holder receives as input parameters one or more of:

a value holder that an old target currently points to;

a value holder that a target currently points to;

a target value;

a target cardinality.

first instructions for updating a source value holder of the source object to identify the target object; and

wherein a value holder is an object that wrappers a target or source object in order to implement a proxy pattern.

```
        setting the value in the source value holder to
null;
```

28. The computer program product of claim 23, wherein the value holder receives as input parameters one or more

of:

- a value holder that a source currently points to;
- a value holder that a target currently points to;
- a source value;
- a target value;
- a source cardinality; and
- a target cardinality.

29. An apparatus for updating an object association between a source object and a target object , comprising:

- means for updating a target value holder of the target object to identify the source object; and

- means for updating a source value holder of the source object to identify the target object;

- wherein a value holder is an object that wrappers a target or source object in order to implement a proxy pattern.

30. An apparatus for deleting an object association between a source object and a target object , comprising:

- means for updating a source value holder of the source object to identify the target object; and

- means for updating a target value holder of the target object to identify the source object;

- wherein a value holder is an object that wrappers a target or source object in order to implement a proxy pattern.

2025-04-24 14:24:24


ABSTRACT OF THE DISCLOSURE**APPARATUS AND METHOD FOR MAINTAINING OBJECT ASSOCIATIONS
IN AN OBJECT ORIENTED ENVIRONMENT**

An apparatus and method for maintaining object associations in an object oriented environment is provided. The apparatus and method make use of value holders to enable a single method to perform the creation and/or update of object associations for all combinations of possible object associations including one to one associations, one to many associations, many to one and many to many associations.

006274-070000




AUS9-2000-0294-US1

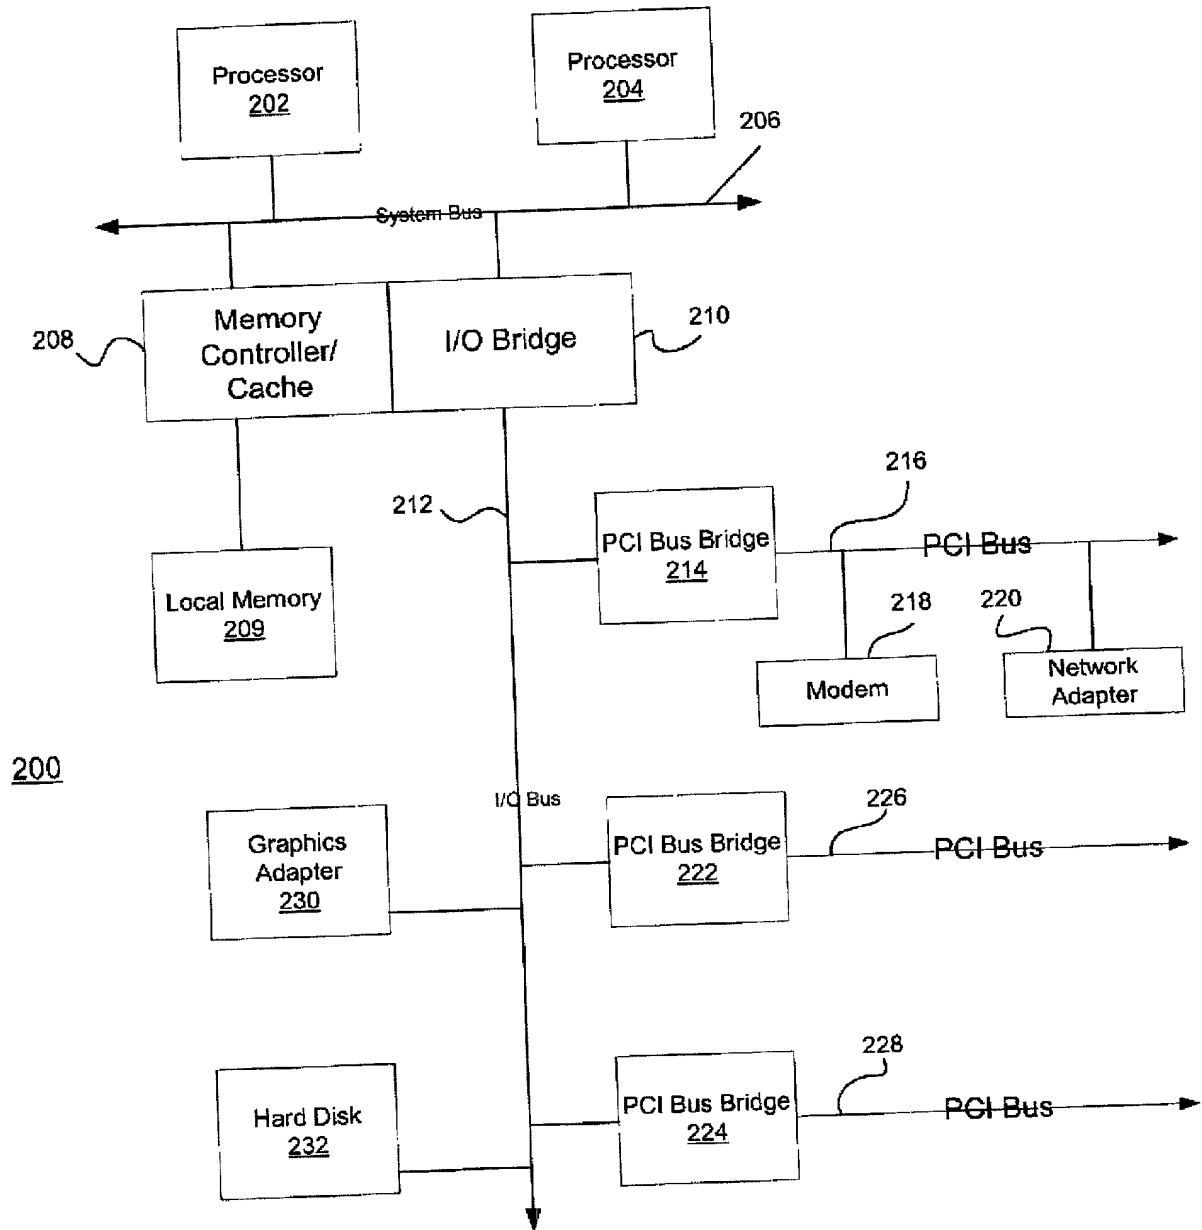**Figure 2A**


AUS9-2000-0294-US1



AUS9-2000-0294-US1

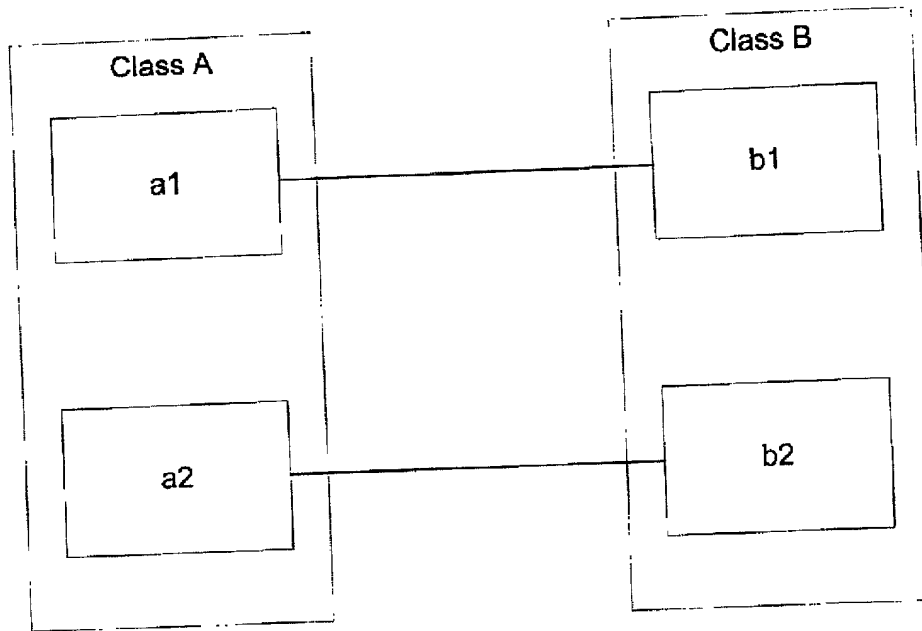**Figure 3A**

AUS9-2000-0294-US1

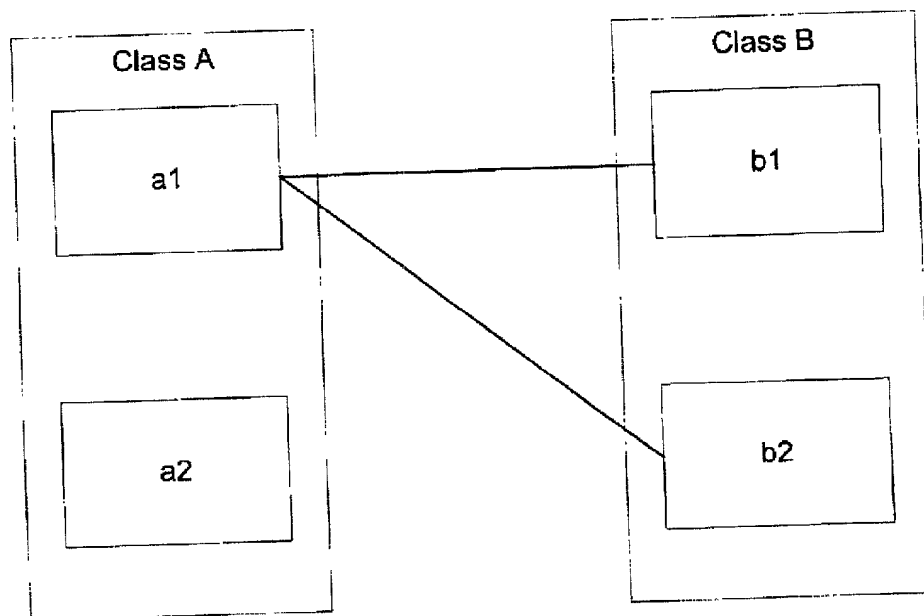**Figure 3B**

AUS9-2000-0294-US1

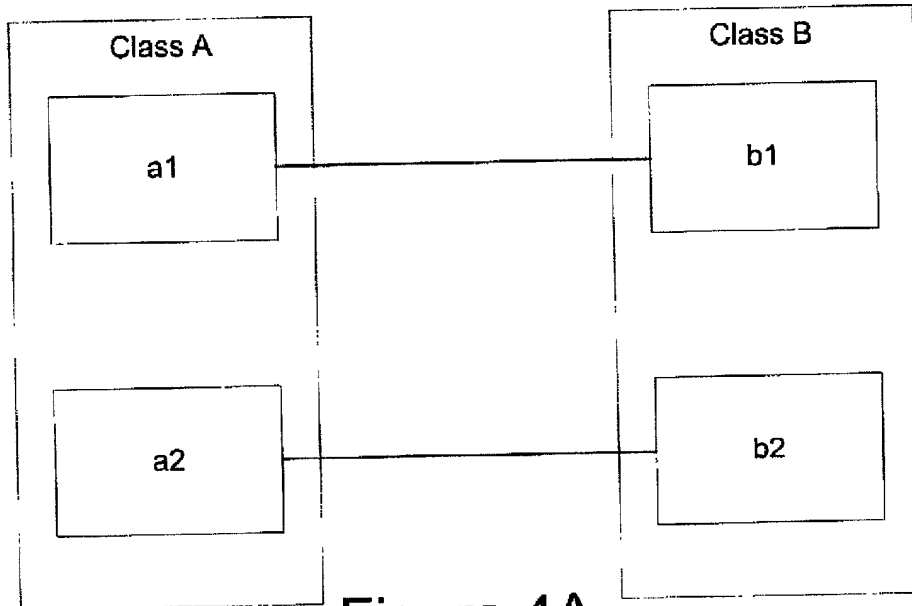


Figure 4A

AUS9-2000-0294-US1

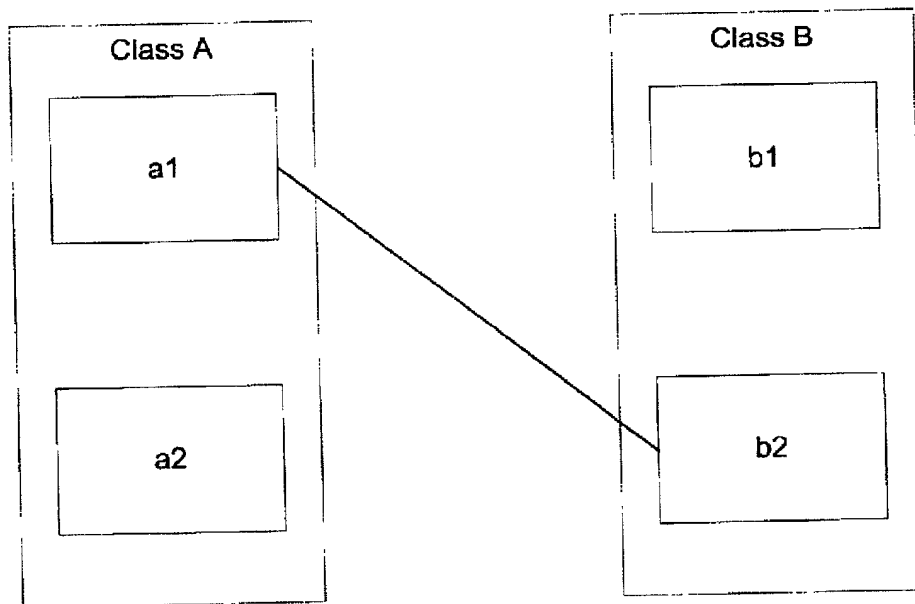


Figure 4B

AUS9-2000-0294-US1

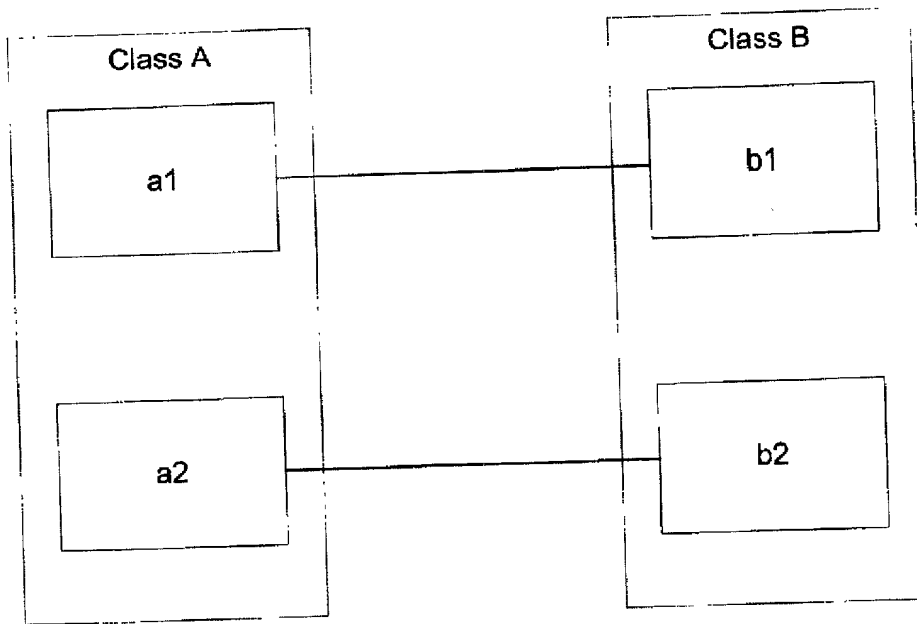


Figure 5A

AUS9-2000-0294-US1

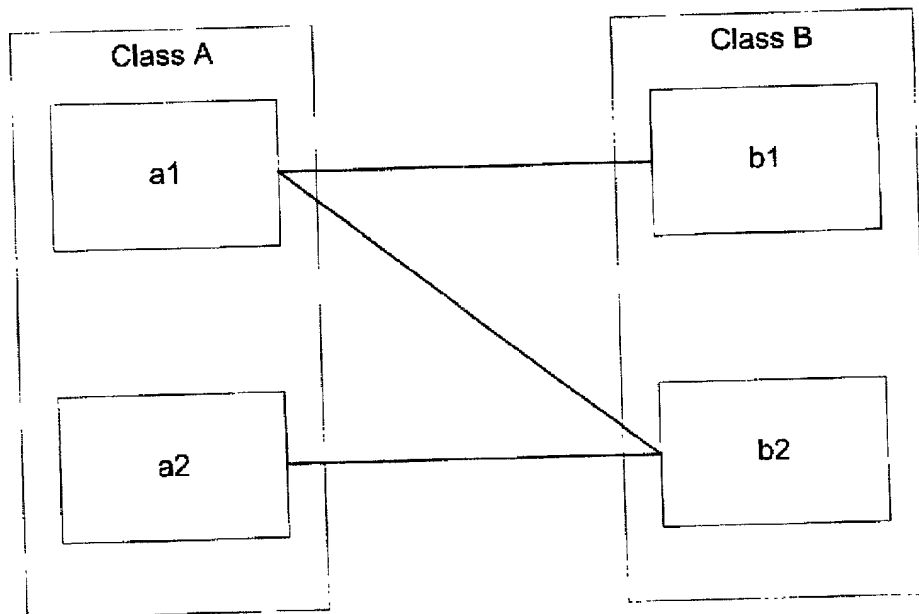


Figure 5B

AUS9-2000-0294-US1


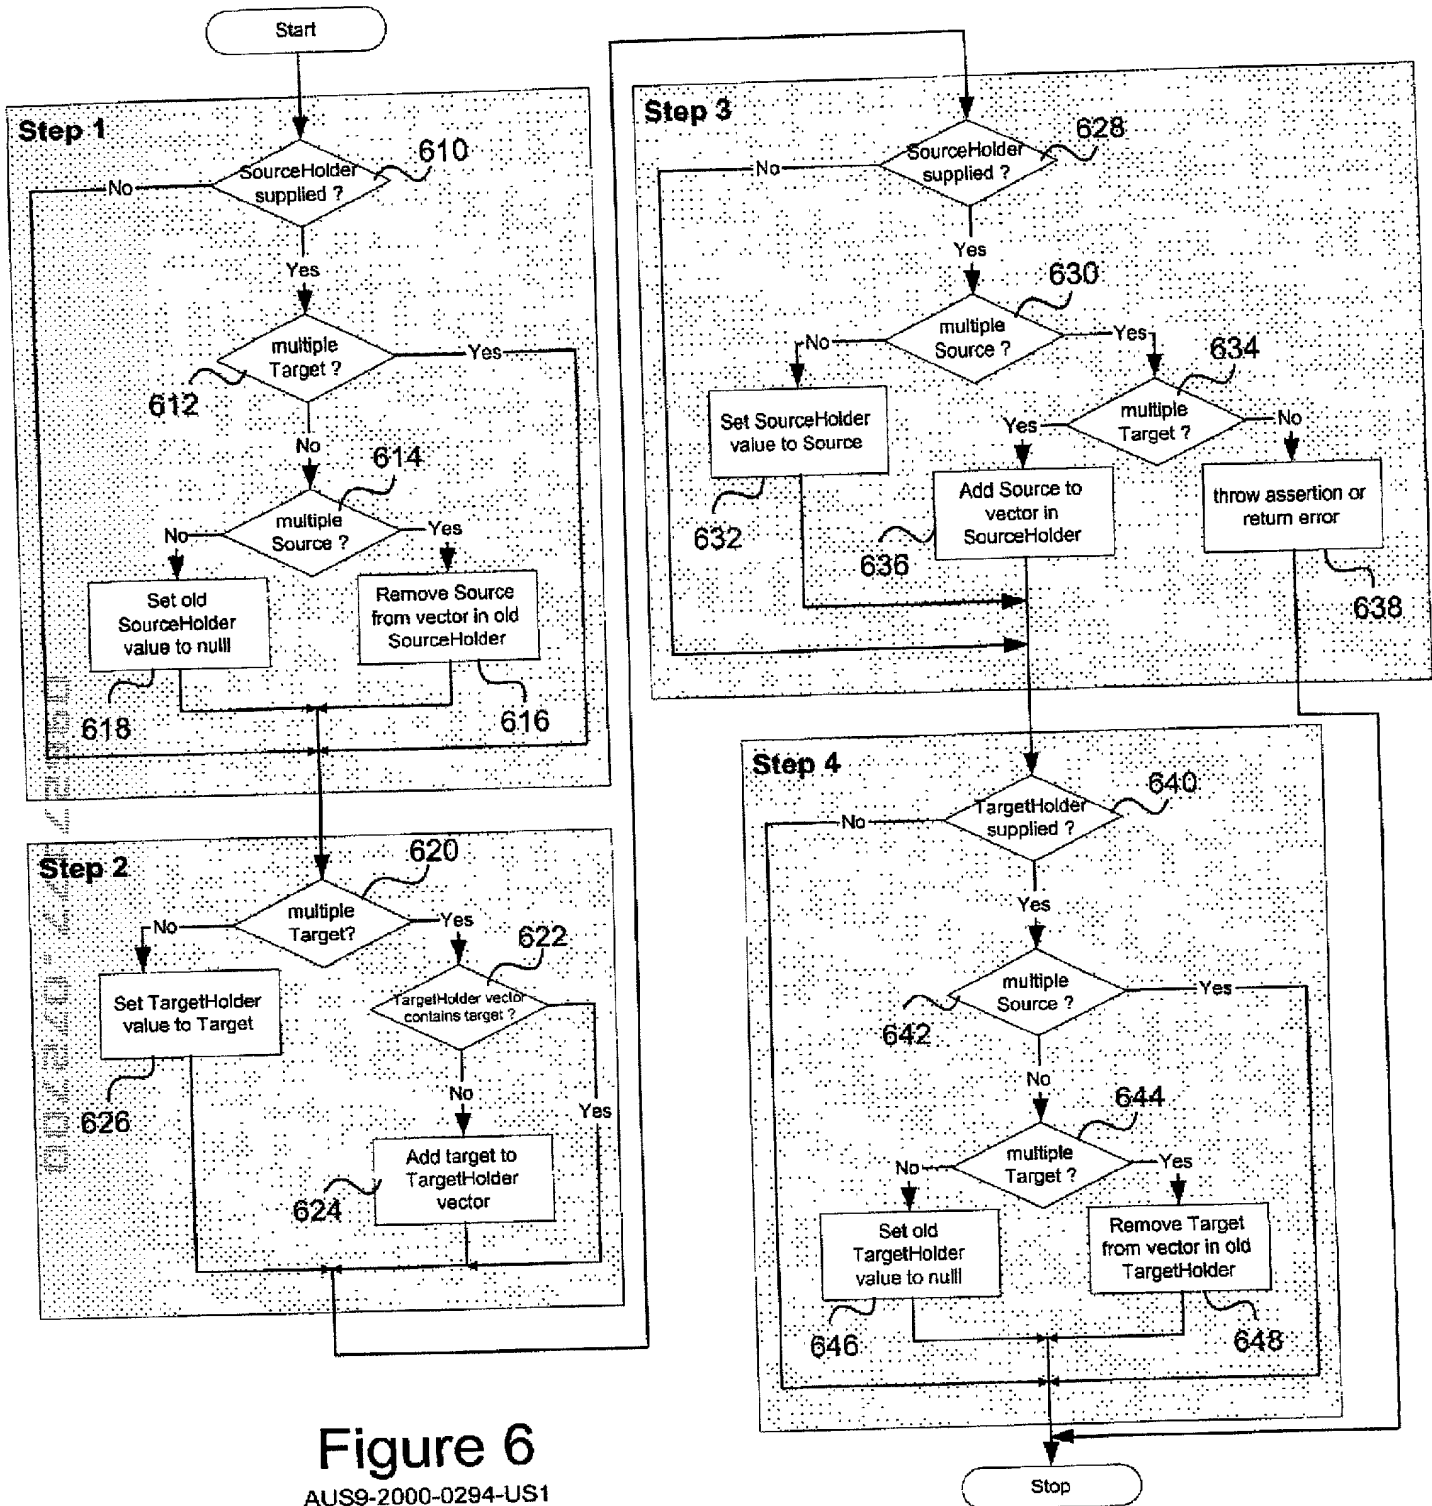


Figure 6
AUS9-2000-0294-US1

Figure 7

AUS9-2000-0294-US1

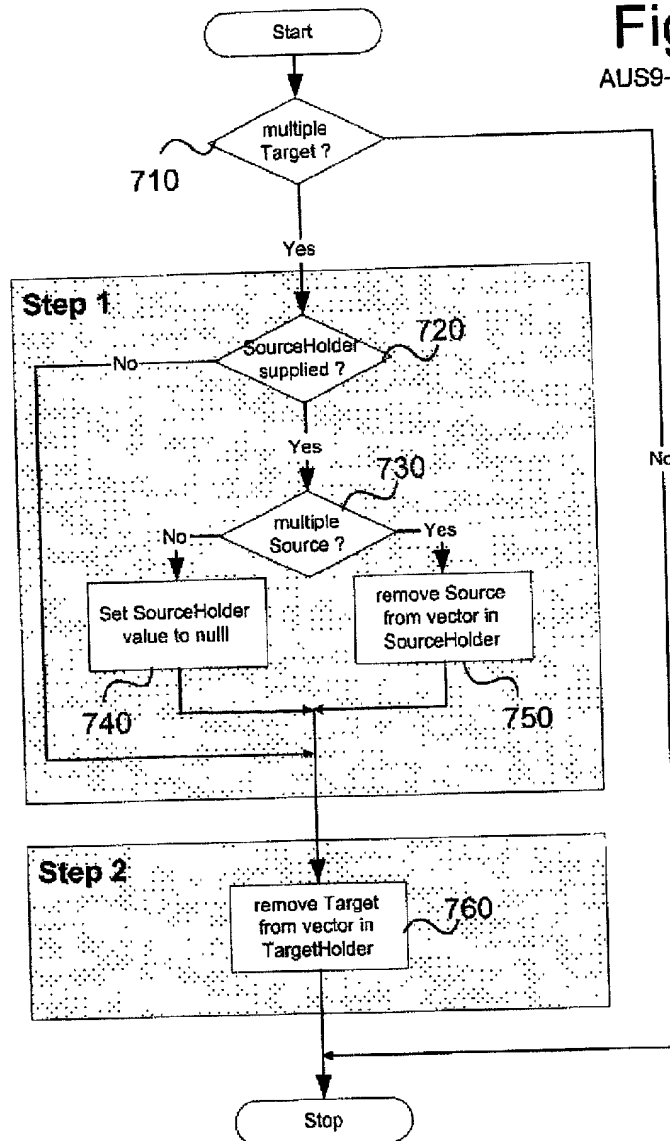

Docket No. AUS9-2000-0294-US1

DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

APPARATUS AND METHOD FOR MAINTAINING OBJECT
ASSOCIATIONS IN AN OBJECT ORIENTED ENVIRONMENT

the specification of which (check one)

☒ is attached hereto.☐ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

_____	_____	_____	_____ Yes _____ No
(Number)	(Country)	(Day/Month/Year)	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial #)	(Filing Date)	(Status)

JUL 24 2000 11:20 FR IBM AUSTIN IPLAW

512 823 1036 TO 917027316636

P.04/05

Docket No. AUS9-2000-0294-US1

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Barksdale, Jr., Reg. No. 24,091; Casimer K. Salys, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. LaBaw, Reg. No. 31,633; David A. Mims, Jr., Reg. 32,708; Volal Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; Duke W. Yee, Reg. No. 34,285; Colin P. Cahoon, Reg. No. 38,836; Stephen R. Loe, Reg. No. 43,757; Stephen J. Walder, Jr., Reg. No. 41,534; Charles D. Stepps, Jr., Reg. No. 45,880; and Stephen R. Tkacs, Reg. No. P-46,430.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 367-2001

FULL NAME OF SOLE OR FIRST INVENTOR: Mark David Nielsen

INVENTORS SIGNATURE: Mark David Nielsen DATE: July 24, 2000

RESIDENCE: 1703 Prairie Mark Lane
Houston, Texas 77077

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE

FULL NAME OF SECOND INVENTOR: Michael Albert Parks

INVENTORS SIGNATURE: _____ DATE: _____

RESIDENCE: 16825 Squaw Valley Lane
Austin, Texas 78717

CITIZENSHIP: United Kingdom

POST OFFICE ADDRESS: SAME AS ABOVE

JUL 25 2000 06:34 FR IBM AUSTIN :FLAW

512 923 1036 TO 93143403

P.03/05

Docket No. AUS9-2000-0294-US1

DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

APPARATUS AND METHOD FOR MAINTAINING OBJECT
ASSOCIATIONS IN AN OBJECT ORIENTED ENVIRONMENT

the specification of which (check one)

X_ is attached hereto.

_____ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed
_____	_____	_____	Yes NO
(Number)	(Country)	(Day/Month/Year)	

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____	_____	_____
(Application Serial #)	(Filing Date)	(Status)

004240 2272950

JUL 25 2000 09:34 FR IBM AUSTIN IFLAW

512 923 1036 TO 93143403

P.04-05

Docket No. AUS9-2000-0294-US1

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; James H. Sarksdale, Jr., Reg. No. 24,091; Casimer K. Salya, Reg. No. 28,900; Robert M. Carwell, Reg. No. 28,499; Douglas H. Lefevre, Reg. No. 26,193; Jeffrey S. Labaw, Reg. No. 31,633; David A. Mims, Jr., Reg. 32,708; Volel Emile, Reg. No. 39,969; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,751; Marilyn S. Dawkins, Reg. No. 31,140; Mark E. McBurney, Reg. No. 33,114; Duke W. Yee, Reg. No. 34,285; Colin P. Cahoon, Reg. No. 38,836; Stephen R. Los, Reg. No. 43,757; Stephen J. Walder, Jr., Reg. No. 41,534; Charles D. Stepps, Jr., Reg. No. 45,880; and Stephen R. Tkacs, Reg. No. P-46,430.

Send correspondence to: Duke W. Yee, Carstens, Yee & Cahoon, LLP, P.O. Box 802334, Dallas, Texas 75380 and direct all telephone calls to Duke W. Yee, (972) 367-2001

FULL NAME OF SOLE OR FIRST INVENTOR: Mark David Nielsen

INVENTORS SIGNATURE: _____ DATE: _____

RESIDENCE: 1703 Prairie Mark Lane
Houston, Texas 77077

CITIZENSHIP: United States

POST OFFICE ADDRESS: SAME AS ABOVE

FULL NAME OF SECOND INVENTOR: Michael Albert Perks

INVENTORS SIGNATURE: Michael Albert Perks DATE: 25th July 2000

RESIDENCE: 16825 Squaw Valley Lane
Austin, Texas 78717

CITIZENSHIP: United Kingdom

POST OFFICE ADDRESS: SAME AS ABOVE